




DIN 7972 C

~ISO 1482

Norma stažena

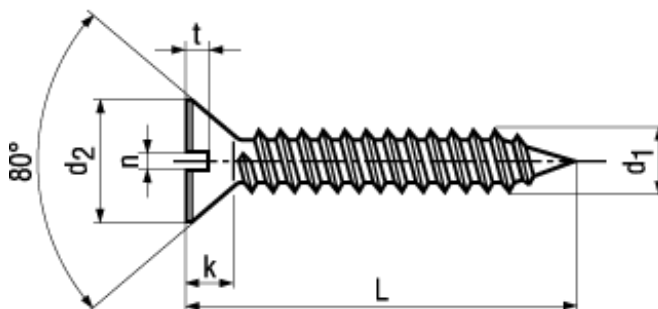

## BN 693

## Šrouby do plechu se zápustnou hlavou

s drážkou a špičkou typ C

Nerezová ocel A2

- ~UNI 6952 AB
- ~CSN 021236



Zapuštění musí být zhotoveno dle odpovídající normy!

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k~	n	t min.	L
1260480	ST2,9	5,5	1,7	0,8	0,5	6,5
1260499						9,5
1260502						13
1260510						16
1260553	ST3,5	6,8	2,1	1	0,6	6,5
1260561						9,5
1260588						13
1260596						16
1260618						19
1260634						25
1260677	(ST3,9)	7,5	2,3	1	0,7	9,5
1260685						13
1260693						16
1260707						19
1260723						25
1260766	ST4,2	8,1	2,5	1,2	0,75	9,5
1260774						13
1260782						16
1260790						19
1260812						25
1260820						32
1260855	ST4,8	9,5	3	1,2	0,85	13
1260863						16
1260871						19
1260901						25

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k~	n	t min.	L
1260928	ST4,8	9,5	3	1,2	0,85	32
1260936						38
1260944						45
1260952						50
8176426						60