


	VSM 12770 A	~ISO 2339 A	~DIN 1	60 HRC
---	-------------	-------------	--------	--------

Standard withdrawn

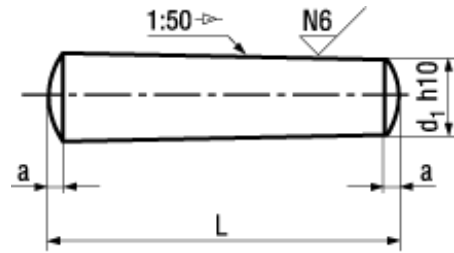

BN 1209
Taper pins
hardened, ground
Steel hardened 60 HRC
plain
<ul style="list-style-type: none"> • ~UNI 7283 • ~CSN 022153 • Tolerance: h10

Article#	d ₁	a~	L
1418394	2	0,25	12
1418416			16
1418424			20
1418432			25
1418440			30
1418521	3	0,4	12
1418556			16
1418564			20
1418572			25
1418580			30
1418599			35
1418602			40
1418610	4	0,5	12
1418637			16
1418645			20
1418653			25
1418661			30
1418688			35
1418696			40
1418726			50
1418734			60
1418750	5	0,63	20

Article#	d ₁	a~	L
1418769	5	0,63	25
1418777			30
1418785			35
1418793			40
1418807			45
1418815			50
1418823			60
1418831			70
1418858	6	0,8	20
1418866			25
1418874			30
1418882			35
1418890			40
1418904			45
1418912			50
1418920			60
1418939			70
1418947	8	1	30
1418955			35
1418963			40
1418971			45
1418998			50
1419005			60
1419013			70
1419021			80
1419048			100
1419056	10	1,2	30
1419072			40
1419099			50
1419102			60
1419110			70
1419129			80
1419137			100
1419145	12	1,6	30
1419161			40
1419196			50
1419218			60
1419226			70
1419234			80
1419242			100