


DIN 258

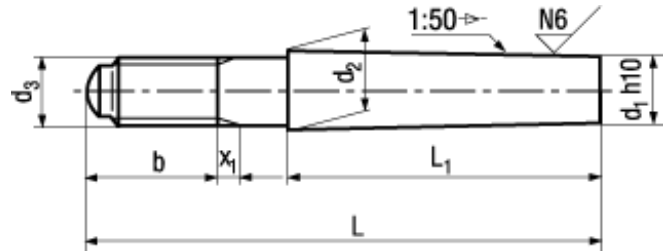

BN 864

Taper pins with thread

constant taper length, unhardened, ground

Free-cutting steel

plain

- ~SN 212781
- ~UNI 7285
- ~CSN 022154
- Tolerance: h10



| Article# | d ₁ | d ₂ | d ₃ | L ₁ | x ₁ max. | b | L |
|----------|----------------|----------------|----------------|----------------|---------------------|------|-----|
| 1314688 | 5 | 5,5 | M5 | 25 | 2 | 12 | 40 |
| 1314742 | 6 | 6,6 | M6 | 30 | 2,5 | 6 | 40 |
| 1314750 | | | | | | 11 | 45 |
| 1314769 | | | | | | 16 | 50 |
| 1314785 | | | | | | 18 | 60 |
| 1314793 | 8 | 8,8 | M8 | 40 | 3,2 | 10 | 55 |
| 1314807 | | | | | | 15 | 60 |
| 1314815 | | | | | | 20 | 65 |
| 1314823 | | | | | | 22 | 75 |
| 1314874 | 10 | 10,9 | M10 | 45 | 3,8 | 14 | 65 |
| 1314882 | | | | | | 24 | 75 |
| 1314890 | | | | | | | 85 |
| 1314904 | | | | | | | 100 |
| 1314939 | 12 | 13,1 | M12 | 55 | 4,3 | 23,5 | 85 |
| 1314947 | | | | | | 27 | 100 |
| 1314955 | | | | | | | 120 |
| 1314963 | | | | | | | 140 |
| 1315021 | 16 | 17,4 | M16 | 72 | 5 | 20,5 | 100 |
| 1315048 | | | | | | 35 | 120 |
| 1315056 | | | | | | | 140 |
| 1315064 | | | | | | | 160 |
| 1315072 | 20 | 21,7 | M16 | 85 | 6,3 | 35 | 120 |
| 1315080 | | | | | | | 140 |
| 1315099 | | | | | | | 160 |