


BN 641
Self-clinching nuts
Stainless steel A1

i For sheet metal with max. hardness HRB 70
 Special dimensions for plate thickness of less than 1 mm or spacer bushings on request

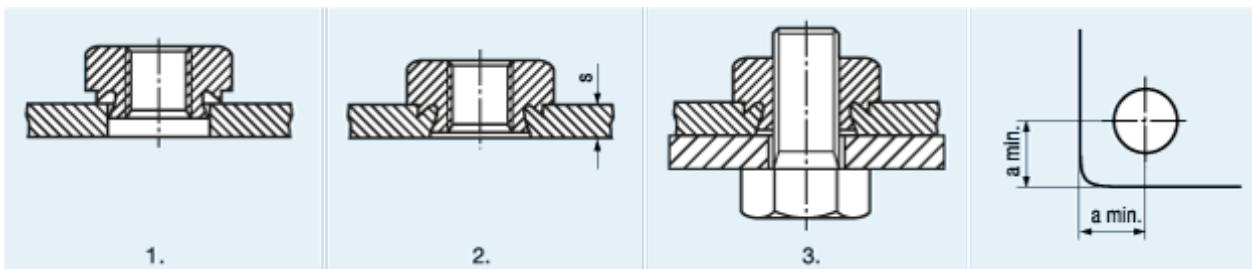

1. Drill or punch the bore, do not countersink or deburr it.
2. On punched bores, do not insert the nut from the side with the burr.
3. Fasten the screw from the opposite side.

Article#	d ₁	d ₂ max.	d ₃	k	a min.	Hole size +0,08/0	s	h max.
1266241	M2	4,15	6,4	1,75	4,8	4,22	1,1-1,4	1,05
1266292	M2,5	4,15	6,4	1,75	4,8	4,22	1,1-1,4	1,05
1266330	M3	4,7	7,1	1,75	5,6	4,75	1,1-1,4	1,05
1266438	M4	5,35	7,9	2,4	6,9	5,41	1,1-1,4	1,05
1266470	M5	6,3	8,7	2,4	7,1	6,35	1,1-1,4	1,05
1266500	M6	8,7	11,1	4,4	8,6	8,75	1,4-2,3	1,35
1266535	M8	10,45	12,7	6	9,7	10,5	1,4-2,3	1,35