




DIN 982

DIN 6924

~ISO 7040

8

Standard withdrawn

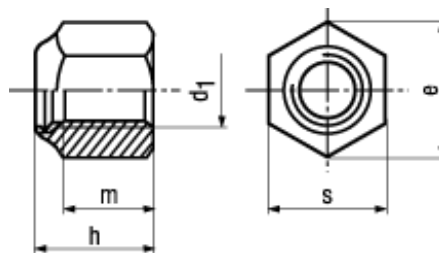

BN 164
Prevailing torque type hex lock nuts
high type with polyamide insert
Steel 8
zinc plated blue
<ul style="list-style-type: none"> • ~UNI 7473 • ~NFE 25-409



M10; M12; M14; M22: wrench size according to ISO on request, M27; M36: acc. DIN 6924

Article#	d ₁	e min.	h	m	s
1095129	M5	8,79	6,3	4,4	8
1095137	M6	11,05	8	4,9	10
1095145	M8	14,38	9,5	6,44	13
1095153	M10	18,9	11,5	8,04	17
1095161	M12	21,1	14	10,37	19
1095188	M14	24,49	16	12,1	22
1095196	M16	26,75	18	14,1	24
1095218	M18	29,56	20	15,1	27
1095226	M20	32,95	22	16,9	30
1095234	M22	35,03	25	18,1	32
1095242	M24	39,55	28	20,2	36
8205140	M27	45,2	31	22,5	41
8205167	M36	60,8	38,9	29,4	55