




DIN 7967

Standard withdrawn

Palnut®

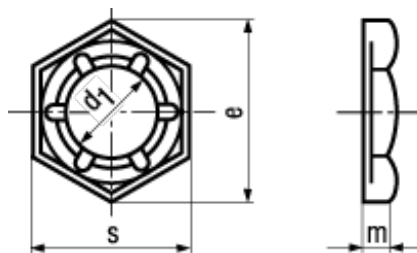



BN 1964

Self-locking counter nuts

Spring steel

black

- ~UNI 8835

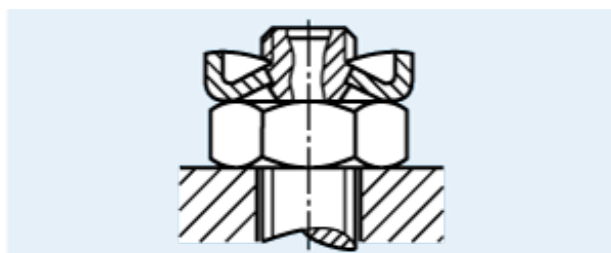

Tightening of the lock nut: Assemble the lock nut by hand, then apply a further 1/4 to 1/2 turn with a wrench.

Article#	d ₁	e~	s	m
1382276	M4	8,1	7	2,5
1382284	M5	9,2	8	2,5
1382292	M6	11,5	10	3
1382306	M8	15	13	3,5
1382314	M10	19,6	17	4
1382322	M12	21,9	19	4,5
1382349	M16	27,7	24	5
5505518	M18	31,2	27	5,5
1382365	M20	34,6	30	6
1382373	M22	36,9	32	6
1382381	M24	41,6	36	7
3092803	M30	53,1	46	8