




DIN 933 Sz

~ISO 4017

8.8

Norma stažena

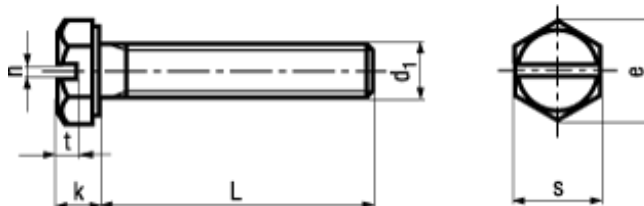

BN 63

Šrouby se šestihrannou hlavou

s drážkou s plným závitem

Ocel 8.8

pozinkováno modře

- ~UNI 5739
- ~CSN 021105

n min.; t min.: drážka dle DIN 962

Article#	d ₁	e	k	s	n min.	t min.	L
1054872	M4	7,66	2,8	7	1,06	1,12	6
1054880							8
1054899							10
1054902							12
1054929							16
1054945							20
1054953							25
1054988	M5	8,79	3,5	8	1,26	1,4	8
1054996							10
1055003							12
1055038							16
1055046							20
1055054							25
3059337	M6	11,05	4	10	1,66	1,6	8
1055070							10
1055089							12
1055100							16
1055119							20
1055127							25
1055135							30
1055143							35
1055151							40

n min.; t min.: drážka dle DIN 962

Article#	d ₁	e	k	s	n min.	t min.	L
1055178	M8	14,38	5,3	13	2,06	2,12	12
1055194							16
1055208							20
1055216							25
1055224							30
1055240							40