




DIN 964 A

~ISO 2010

Norma stažena

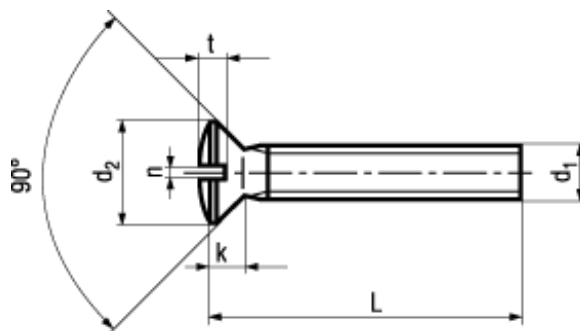

BN 1405

Šrouby se zápustnou čočkovou hlavou

s drážkou

Mosaz

bez povrchové úpravy

- ~UNI 6110
- ~CSN 021155

Article#	d ₁	d ₂ max.	k max.	n	t min.	L
1162136	M3	5,6	1,65	0,8	1,2	8
1162144						10
1162152						12
1162179						16
1162187						20
1162209						30
1162217	M4	7,5	2,2	1	1,6	6
1162225						8
1162233						10
1162241						12
1162276						16
1162284						20
1162292						25
1162306						30
1162314						35
1162322						40
1162330						45
1162349						50
1162373	M5	9,2	2,5	1,2	2	10
1162381						12
1162411						16
1162438						20

Article#	d ₁	d ₂ max.	k max.	n	t min.	L
1162446	M5	9,2	2,5	1,2	2	25
1162454						30
1162462						35
1162470						40
1162497						50
1162500	M6	11	3	1,6	2,4	10
1162519						12
1162535						16
1162543						20
1162551						25
1162578						30
1162586						35
1162594						40
1162616						50
1162624						60