




DIN 963 A

~ISO 2009

Norma stažena

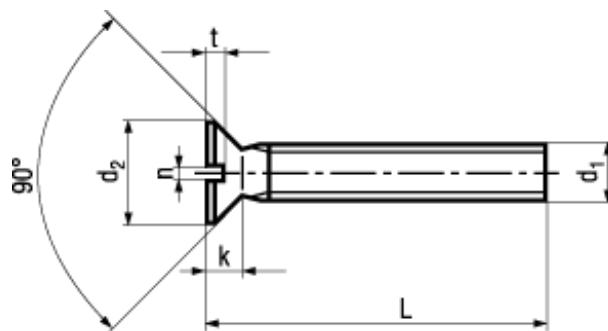

BN 537

Šrouby se zápustnou hlavou

s drážkou

Mosaz

bez povrchové úpravy

- ~UNI 6109
- ~CSN 021151

Article#	d ₁	d ₂	k max.	n	t min.	L
1160508	M1	1,9	0,6	0,25	0,2	3
1160516						4
1160524						5
1160532						6
1160540						8
1160559	M1,2	2,3	0,72	0,3	0,25	3
1160567						4
1160575						5
1160583						6
1160591						8
1160605	M1,6	3	0,96	0,4	0,32	3
1160613						4
1160621						5
1160648						6
1160656						8
1204564	M2	3,8	1,2	0,5	0,4	3
1204572						4
1204580						5
1204599						6
1204602						8
1204610						10
1160664						12

Article#	d ₁	d ₂	k max.	n	t min.	L
1160710	M2,5	4,7	1,5	0,6	0,5	3
1160729						4
1204866						5
1204874						6
1204882						8
1204890						10
1204904						12
1160745						16
1160788	M3	5,6	1,65	0,8	0,6	3
1160796						4
1205145						5
1205153						6
1205161						8
1205188						10
1205196						12
1160818						(14)
1205226						16
1205242						20
1205250						25
1205269						30
1160826						35
1160834						40
1160842	M4	7,5	2,2	1	0,8	5
1205455						6
1205463						8
1205471						10
1205498						12
1160850						(14)
1205528						16
1205544						20
1205560						25
1205579						30
1160869						35
1160877						40
1160885						45
1160893						50
1160907						60
1205641	M5	9,2	2,5	1,2	1	8
1205668						10
1205676						12
1160915						(14)

Article#	d ₁	d ₂	k max.	n	t min.	L
1205692	M5	9,2	2,5	1,2	1	16
1205714						20
1205730						25
1205749						30
1160923						35
1205765						40
1160931						45
1160958						50
1160966						60
1205838	M6	11	3	1,6	1,2	10
1205846						12
1160974						(14)
1205862						16
1205889						20
1205900						25
1205919						30
1160982						35
1205935						40
1160990						45
1205951						50
1161008						60
1206028	M8	14,5	4	2	1,6	20
1206036						25
1206044						30
1206060						40
1206087						50
1206117	M10	18	5	2,5	2	25
1206125						30
1206141						40