


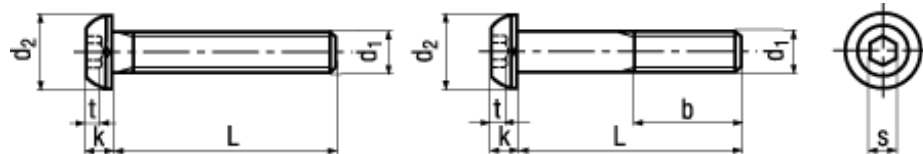

ISO 7380-1

**BN 1593****Šrouby s čočkovou hlavou**

s vnitřním šestihranem s plným / částečným závitem

Nerezová ocel A2

- Pevnost v tahu min. 600 N/mm²
- 0,2% mez tažnosti min. 450 N/mm²

b: provedení s částečným závitem nelze zaručit

Article#	d ₁	d ₂ max.	k max.	s	t min.	b	L
1568922	M3	5,7	1,65	2	1,04	-	5
1348663							6
1348698							8
1348728							10
1348744							12
1348752							(14)
1348779							16
1568930							20
1575236						18	25
1575244							30
1575252	M4	7,6	2,2	2,5	1,3	-	6
1348787							8
1348809							10
1348825							12
1348841							(14)
1348876							16
1575260							20
1575279							25
1575287						20	30
5801520							35
8268398	M5	9,5	2,75	3	1,56	-	6
1348892							8

b: provedení s částečným závitem nelze zaručit

Article#	d ₁	d ₂ max.	k max.	s	t min.	b	L
1348906	M5	9,5	2,75	3	1,56	-	10
1348914							12
1348922							(14)
1348949							16
1349007							20
1349023							25
1349031						22	30
1575295							35
1575309							40
5801540							45
5801550							50
1349058	M6	10,5	3,3	4	2,08	-	8
1349066							10
1349082							12
1349104							(14)
1349120							16
1349139							20
1349155							25
1349228							30
1575325						24	35
1575333							40
1575341							45
1575368							50
3059827							55
3059825							60
1349244	M8	14	4,4	5	2,6	-	10
1349260							12
1349279							16
1349287							20
1349295							25
1349309							30
1575376							35
1575384						28	40
1575392							45
1575406							50
5801570							60
5521803							80
5801580	M10	17,5	5,5	6	3,12	-	12
1349317							16
1349325							20
1349333							25

b: provedení s částečným závitem nelze zaručit

Article#	d ₁	d ₂ max.	k max.	s	t min.	b	L
1349341	M10	17,5	5,5	6	3,12	-	30
1575457							35
1575465							40
1575473						32	45
1575481							50
5801590							60
1575503	M12	21	6,6	8	4,16	-	16
1575511							20
1575538							25
1575546							30
1575554							35
1575562							40
1575570							45
1575589							50