


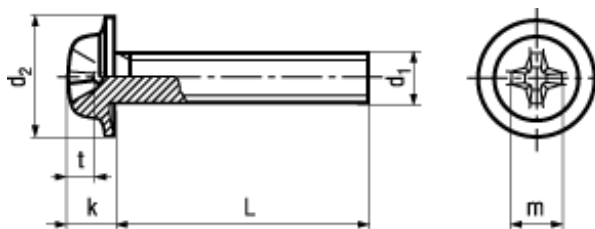

ecosyn®-fix

4.8

**BN 4825****Šrouby s čočkovou hlavou s přírubou**

s křížovou drážkou Phillips typ H

Ocel 4.8

pozinkováno modře



V souvislosti s geometrií hlavy je třeba počítat se sníženým utahovacím momentem!
Technická brožura je dostupná na vyžádání.

Article#	d ₁	d ₂ max.	k max.		m~	t min.	t max.	L
3787554	M2	5	1,9	1	2,2	0,6	1	3
3787555								4
3787556								5
3787557								6
3787558								8
3787559								10
3787560								12
2095726	M2,5	6,5	2,3	1	2,6	1	1,4	4
2095734								5
2095742								6
2095750								8
2095769								10
2095777								12
3056345	M3	8	2,7	2	3,5	0,9	1,4	3
2095785								4
2095793								5
1070479								6
1198440								8
1070568								10
1198459								12
3056347								16
3056349	M4	10	3,4	2	4,1	1,5	2,1	4

Article#	d ₁	d ₂ max.	k max.		m~	t min.	t max.	L
2095807	M4	10	3,4	2	4,1	1,5	2,1	5
2095815								6
1198157								8
1198165								10
1198173								12
1198181								16
3056350								20
2095823	M5	12	4,2	2	4,8	2,2	2,8	6
2095831								8
1198203								10
1198211								12
1198238								16
1198246								20
3056351								25
2095858	M6	14	4,9	3	6,2	2,3	2,9	8
2095866								10
1198254								12
1198262								16
1198270								20
1198289								25
3056352								30