




DIN 7982 C

~ISO 7050

Norma stažena

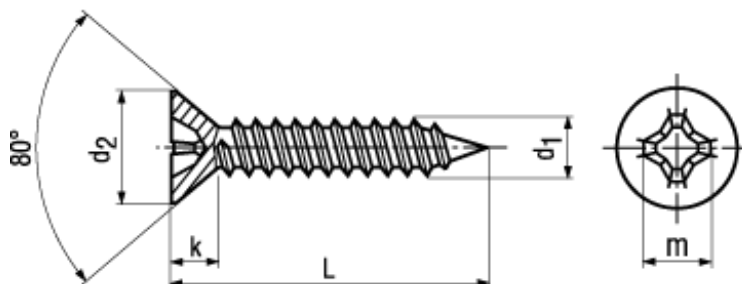

BN 696

Šrouby do plechu se zápustnou hlavou


s křížovou drážkou Phillips typ H a špičkou typ C


Nerezová ocel A2


- ~UNI 6955 AB
- ~CSN 021237



Zapuštění musí být zhotoveno dle odpovídající normy!

Article#	d ₁	d ₂ max.	k~		m~	L
1214268	ST2,2	4,3	1,3	1	2,5	6,5
1214276						9,5
1214284						13
1579797						16
1579827						19
1579940	ST2,9	5,5	1,7	1	3	6,5
1262475						9,5
1262483						13
1262491						16
1262505						19
1262513						22
1262521						25
1262548						32
1262556	ST3,5	6,8	2,1	2	4,2	9,5
1262564						13
1262572						16
1262580						19
1262599						22
1262602						25
1262610						32
1262629						38
3059892						45
1262637	(ST3,9)	7,5	2,3	2	4,6	9,5
1262645						13
1262653						16

Article#	d ₁	d ₂ max.	k~		m~	L
1262661	(ST3,9)	7,5	2,3	2	4,6	19
1262688						22
1262696						25
1262718						32
1262726						38
3059893						45
3059894						50
1262734	ST4,2	8,1	2,5	2	4,7	9,5
1262742						13
1262750						16
1262769						19
1262777						22
1262785						25
1262793						32
1262807						38
1262815						45
1397400						50
3059895						60
5504826						70
1262823	ST4,8	9,5	3	2	5,1	13
1262831						16
1262858						19
1262866						22
1262874						25
1262882						32
1262890						38
1262904						45
1262912						50
2094363						60
2094371						70
2094398						80
1262939	ST5,5	10,8	3,4	3	6,8	16
1262947						19
1262955						22
1262963						25
1262971						32
1262998						38
1263005						45
1263013						50
2094401						60
2094428						70

Article#	d ₁	d ₂ max.	k~		m~	L
2094436	ST5,5	10,8	3,4	3	6,8	80
1263021	ST6,3	12,4	3,8	3	7,1	16
1263048						19
1263056						22
1263064						25
1263072						32
1263080						38
1263099						45
1263102						50
2094444						60
2094452						70
2094460						80