




DIN 7983 C

~ISO 7051

Norma stažena

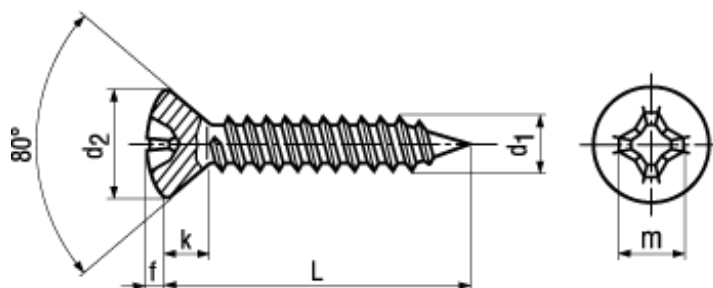

BN 697

Šrouby do plechu se zápusťnou čočkovou hlavou

s křížovou drážkou Phillips typ H a špičkou typ C

Nerezová ocel A2

- ~UNI 6956 AB
- ~CSN 021239

Article#	d ₁	d ₂ max.	f~	k~		m~	L
1214292	ST2,2	4,3	0,7	1,3	1	2,8	6,5
1214306							9,5
1214314							13
1675656							16
1675664							19
1019120	ST2,9	5,5	0,9	1,7	1	3,4	6,5
1263110							9,5
1263129							13
1263137							16
1263145							19
1263153							22
1263161							25
1263188							32
1263196	ST3,5	6,8	1,2	2,1	2	4,6	9,5
1263218							13
1263226							16
1263234							19
1263242							22
1263250							25
1263269							32
1263277							38
3059896							45
3059897							50
1263285	(ST3,9)	7,5	1,3	2,3	2	4,7	9,5
1263293							13
1263307							16

Article#	d ₁	d ₂ max.	f~	k~		m~	L
1263315	(ST3,9)	7,5	1,3	2,3	2	4,7	19
1263323							22
1263331							25
1263358							32
1263366							38
3059898							45
3059899							50
1263374	ST4,2	8,1	1,4	2,5	2	4,9	9,5
1263382							13
1263390							16
1263404							19
1263412							22
1263420							25
1263439							32
1263447							38
1263455							45
1397397							50
1675699	ST4,8	9,5	1,5	3	2	5,4	9,5
1263463							13
1263471							16
1263498							19
1263501							22
1263528							25
1263536							32
1263544							38
1263552							45
1263560							50
1263579	ST5,5	10,8	1,7	3,4	3	7	13
1263587							16
1263595							19
1263609							22
1263617							25
1263625							32
1263633							38
1263641							45
1263668							50
1263684	ST6,3	12,4	2	3,8	3	7,4	19
1263706							25
1263722							38
1263730							45
1263749							50