


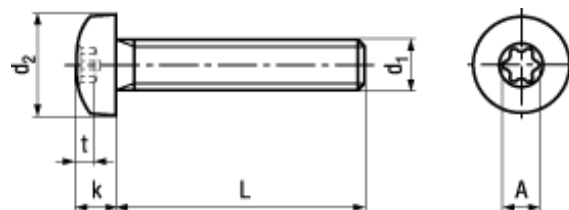

ISO 14583

**BN 20038****Šrouby s čočkovou hlavou**

s vnitřní hvězdíci s plným závitem

Nerezová ocel A4

- Pevnost v tahu min. 600 N/mm²
- 0,2% mez tažnosti min. 450 N/mm²

M1,6: není v ISO 14583 obsaženo

Article#	Customer Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3271682		M1,6	3,2	1,4	X5	0,6	1,49	3
3271683								4
3271684								5
3271686								6
3271687								8
3271688								10
3271689								12
3271690								16
3183823		M2	4	1,6	X6	0,77	1,75	4
3183824								5
3183825								6
3183827								8
3183828								10
3271691								12
3271693								16
3271694								20
3183830		M2,5	5	2,1	X8	1,04	2,4	3
3183831								4
3183832								5
3183833								6
3183834								8
3183835								10
3183836								12
3183837								16
3271695								20
3271696								25

M1,6: není v ISO 14583 obsaženo

Article#	Customer Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3271697		M3	5,6	2,4	X10	1,27	2,8	4
3183838								5
3183839								6
3183840								8
3183841								10
3183842								12
3183844								16
3183845								20
3183846								25
3183847								30
3271698								35
3271699								40
3183848		M4	8	3,1	X20	1,66	3,95	6
3183849								8
3183851								10
3183852								12
3183853								16
3183854								20
3183855								25
3183856								30
3271701								35
3271702								40
3271703								45
3271705								50
3271706		M5	9,5	3,7	X25	1,91	4,5	6
3183857								8
3183859								10
3183860								12
3183861								16
3183862								20
3183863								25
3183865								30
3183866								35
3183867								40
3271707								45
3271709								50
3271710								60
3183868		M6	12	4,6	X30	2,42	5,6	8
3183869								10
3183871								12
3183872								16

M1,6: není v ISO 14583 obsaženo

Article#	Customer Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3183873		M6	12	4,6	X30	2,42	5,6	20
3183874								25
3183875								30
3183876								35
3183877								40
3271711								45
3183878								50
3271712								60