


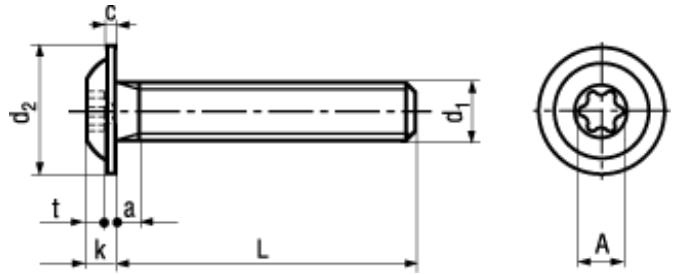

~ISO 7380-2


BN 2058
Šrouby s nízkou čočkovou hlavou s vnitřní hvězdicí


s přírubou a s plným závitem


Nerezová ocel A2

- Pevnost v tahu min. 600 N/mm²
- 0,2% mez tažnosti min. 450 N/mm²



Spojovací díly dle uvedené normy mají s ohledem na geometrii hlavy sníženou zatížitelnost.

Article#	Customer Article#	d ₁	d ₂ max.	k max.	c min.	a max.		t max.	A~	L
3780744		M3	7	1,7	0,55	1	X10	1,27	2,8	6
3780745										8
3780746										10
3780747										12
3780748										16
3780749										20
3780750		M4	9,4	2,2	0,65	1,4	X20	1,66	3,95	6
3780751										8
3780752										10
3780753										12
3780754										16
3780755										20
3780756										25
3780757		M5	11,8	2,8	0,8	1,6	X25	1,95	4,5	8
3780758										10
3780764										12
3780765										16
3780766										20
3780767										25
3780768										30
3780769		M6	13,7	3,3	1	2	X30	2,42	5,6	8
3780770										10
3780771										12
3780772										16
3780773										20
3780774										25

Article#	Customer Article#	d ₁	d ₂ max.	k max.	c min.	a max.		t max.	A~	L
3780775		M6	13,7	3,3	1	2	X30	2,42	5,6	30
3780776										35
3780777										40
3780778		M8	17,8	4,4	1,25	2,5	X40	2,85	6,75	10
3780779										12
3780780										16
3780782										20
3780783										25
3780784										30
3780785										35
3780786										40