


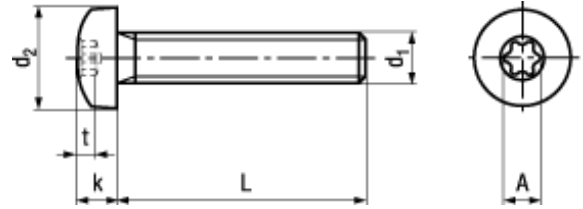

ISO 14583

**BN 5687****Šrouby s čočkovou hlavou**

s vnitřní hvězdíci s plným závitem

Nerezová ocel A2

- Pevnost v tahu min. 600 N/mm²
- 0,2% mez tažnosti min. 450 N/mm²

Article#	Customer Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3061578		M2	4	1,6	X6	0,77	1,75	3
3061579								4
3061581								5
3061582								6
3061583								8
3061584								10
3271646								12
3271647								16
3271648								20
3061585		M2,5	5	2,1	X8	1,04	2,4	3
3061587								4
3061588								5
3061597								6
3061598								8
3061600								10
3061601								12
3061603								16
3271651								20
3271652								25
3271654		M3	5,6	2,4	X10	1,27	2,8	4
3061604								5
3061605								6
3061606								8
3061608								10
3061609								12
3061610								16

Article#	Customer Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3061611		M3	5,6	2,4	X10	1,27	2,8	20
3061612								25
3061613								30
3271655								35
3271657								40
3061615		M4	8	3,1	X20	1,66	3,95	6
3061616								8
3061619								10
3061620								12
3061621								16
3061622								20
3061623								25
3061624								30
3271658								35
3271659								40
3271660								45
3271662								50
3271664		M5	9,5	3,7	X25	1,91	4,5	6
3061626								8
3061627								10
3061628								12
3061629								16
3061944								20
3061945								25
3061946								30
3061947								35
3061949								40
3271665								45
3271666								50
3271667								60
3061951		M6	12	4,6	X30	2,42	5,6	8
3061952								10
3061953								12
3061955								16
3061956								20
3061957								25
3061958								30
3061959								35
3061961								40
3271668								45
3061965								50

Article#	Customer Article#	d ₁	d ₂ max.	k max.		t max.	A~	L
3271669		M6	12	4,6	X30	2,42	5,6	60
3271670		M8	16	6	X45	3,18	7,95	10
3271671								12
3271672								16
3271673								20
3271674								25
3271675								30
3271676								35
3271677								40
3271678								45
3271679								50
3271680								60