




DIN 553

ISO 7434

Norma stažena

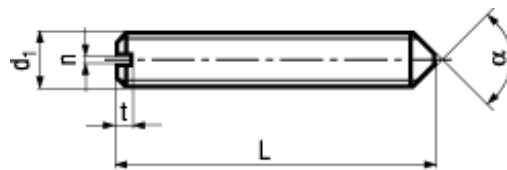

BN 665

Stavěcí šrouby s drážkou

s kuželovým zakončením

Nerezová ocel A1

- ~UNI 6117
- ~CSN 021185

Article#	d ₁	n	t min.	α	L
3646516	M1,6	0,25	0,56	120°	2
3646518				90°	3
3646519					4
3646520					5
3646521					6
1579398	M2	0,25	0,64	120°	2
1579401				90°	3
1579460					4
1579606					5
1579614					6
3059877					8
1579681	M2,5	0,4	0,72	90°	3
1579703					4
1579711					5
1579738					6
3059878					8
1080644	M3	0,4	0,8	120°	3
1080652				90°	4
1251872					5
1251880					6
1251899					8
1251902					10
1251910					12

Article#	d ₁	n	t min.	α	L
1251945	M4	0,6	1,12	120°	4
1251953				90°	5
1251961					6
1251988					8
1251996					10
1252003					12
1252038					16
1252089	M5	0,8	1,28	90°	6
1252097					8
1252100					10
1252119					12
1252135					16
1252143					20
1252194	M6	1	1,6	120°	6
1252208				90°	8
1252216					10
1252224					12
1252240					16
1252259					20
1252267					25
1252275					30
1252291	M8	1,2	2	90°	10
1252305					12
1252321					16
1252348					20
1252364					30
1252372					40