




DIN 553

ISO 7434

14 H / 22 H

Norma stažena

Dle volby výrobce

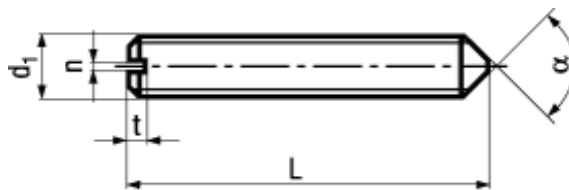

BN 429

Stavěcí šrouby s drážkou

s kuželovým zakončením

Ocel 14 H / 22 H

pozinkováno modře

- ~UNI 6117
- ~CSN 021185



Stavěcí šrouby nejsou určeny pro namáhání tahem.

Article#	d ₁	n	t min.	α	L
1180363	M2	0,25	0,64	90°	3
1180371					4
1180398					5
1180401					6
1180428					8
1098861					10
1180495	M2,5	0,4	0,72	120°	3
1180509				90°	4
1180517					5
1436236					6
1436244					8
1436252					10
1436260					12
1180568	M3	0,4	0,8	120°	3
1180576				90°	4
1180584					5
1180592					6
1180606					8
1180614					10
1180622					12
1436325					16
1180630	M4	0,6	1,12	120°	4
1180649				90°	5
1180657					6
1180665					8
1180673					10
1180681					12

Article#	d ₁	n	t min.	α	L
1180711	M4	0,6	1,12	90°	16
1180738					20
1436392					25
1436406					30
1315862					40
1394053					50
1180746	M5	0,8	1,28	120°	5
1180754				90°	6
1180762					8
1180770					10
1180789					12
1180800					16
1180819					20
1436422					25
1436430					30
1098888					40
1394266					50
1180827	M6	1	1,6	120°	5
1180835					6
1180843				90°	8
1180851					10
1180878					12
1180886					(14)
1180894					16
1180908					20
1180916					25
1180924					30
1436465					35
1436473					40
1065297					50
1180932	M8	1,2	2	120°	8
1180940				90°	10
1180959					12
1180975					16
1180983					20
1180991					25
1181009					30
1447882					35
1447890					40
1447912					50
1065386					60