



závit ve slepém otvoru



zpracovaný v páře



externí chlazení

Obj. číslo

5726

Norma

DIN 2184-1

Norma

~ DIN 371 / ~ DIN 376

Materiál nástroje

HSS-E

Typ

N R40

Tvar

C

Tolerance průměru


2B

Směr řezu

pravý

Rabatová skupina

203

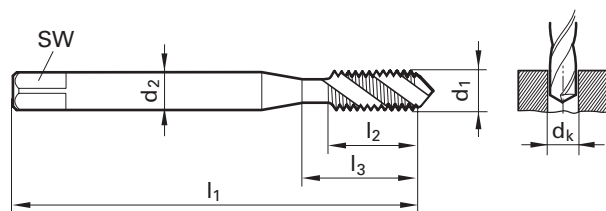

d1 - P	d2	SW	dk	l1	l2	l3	Kód
	mm		mm	mm	mm	mm	
NR. 4 -40	3,500	2,70	2,350	56,00	7,00	18,00	2,845
NR. 6 -32	4,000	3,00	2,850	56,00	8,00	20,00	3,505
NR. 8 -32	4,500	3,40	3,500	63,00	8,00	21,00	4,166
NR.10 -24	6,000	4,90	3,900	70,00	11,00	25,00	4,826
1/4 -20	7,000	5,50	5,100	80,00	13,00	30,00	6,350
5/16-18	8,000	6,20	6,600	90,00	14,00	35,00	7,938
3/8 -16	10,000	8,00	8,000	100,00	16,00	39,00	9,525
7/16-14	8,000	6,20	9,400	100,00	18,00	42,00	11,113
1/2 -13	9,000	7,00	10,800	110,00	20,00	49,00	12,700
5/8 -11	12,000	9,00	13,500	110,00	24,00	53,00	15,875
3/4 -10	14,000	11,00	16,500	125,00	25,00	62,00	19,050
