**BN 915****Závlačky**

jednoduché

Pružinová ocel

pozinkováno modře

- ~UNI 8833 A




ISO 4042

Spojovací díly s tvrdostí ≥ 320 HV s elektrolytickými povlaky: náchylné na vodíkovou křehkost!
Další poznámky k možným rizikům jsou uvedeny v úvodní části.



Jiné povlaky na vyžádání

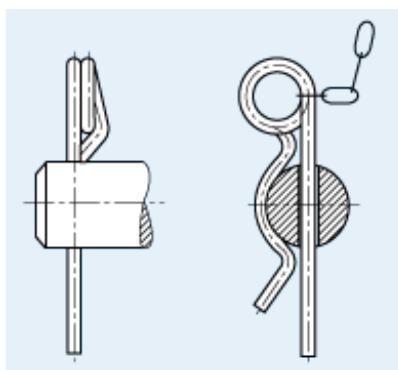

Article#	d ₁	pro průměr hřídele nebo osky		d ₂	L	L ₁
1364685	2	9-14	2,5	10	50	25
1364693	3	10-16	3,5	18	60	28
1364707	4	16-20	4,5	20	60	30
1364715	5	20-28	6	24	85	40
1364723	6	28-40	7	30	105	50
1364731	7	28-45	8	30	105	50
1364758	8	30-45	9	28	110	55