



závit ve slepém otvoru

S povlak TiN

☒ externí chlazení

Obj. číslo

5718

Norma

Norma

Podniková norma

Materiál nástroje

HSS-E

Typ

N R40

Tvar

C

Tolerance průměru


6HX

Směr řezu

pravý

Rabatová skupina

203

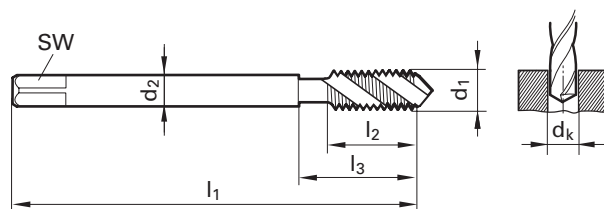

d1	P	d2	SW	dk	l1	l2	l3	Kód
	mm	mm		mm	mm	mm	mm	
M 3	0,50	3,500	2,70	2,500	112,00	6,00	18,00	3,000
M 4	0,70	2,800	2,10	3,300	112,00	7,50	77,00	4,000
M 5	0,80	3,500	2,70	4,200	125,00	8,50	90,00	5,000
M 6	1,00	4,500	3,40	5,000	125,00	11,00	90,00	6,000
M 8	1,25	6,000	4,90	6,800	140,00	14,00	97,00	8,000
M 10	1,50	7,000	5,50	8,500	160,00	16,00	117,00	10,000
M 12	1,75	9,000	7,00	10,200	180,00	18,50	133,00	12,000
M 16	2,00	12,000	9,00	14,000	220,00	20,00	168,00	16,000
M 20	2,50	16,000	12,00	17,500	280,00	25,00	225,00	20,000

pro závit ve slepém otvoru



15