


	<b>Obj. číslo</b>	<b>5719</b>
	<b>Norma</b>	<b>DIN 2184-1</b>
	<b>Norma</b>	<b>DIN 371</b>
	<b>Materiál nástroje</b>	<b>HSS-E</b>
	<b>Typ</b>	<b>N</b>
	<b>Tvar</b>	<b>B</b>
	<b>Tolerance průměru</b>	<b>ISO 3 / 6G</b>
	<b>Směr řezu</b>	<b>pravý</b>
	<b>Rabatová skupina</b>	<b>203</b>



závit v průchozím otvoru

- zpracovaný v páře
- externí chlazení

TOLERANCE  
ISO 3/6G

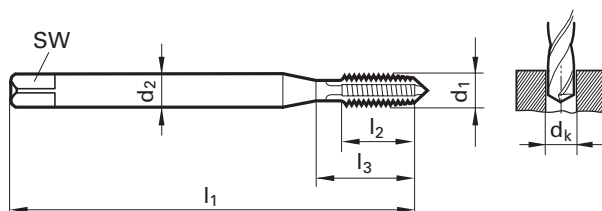

d1	P	d2	SW	dk	l1	l2	l3	Kód
mm	mm	mm		mm	mm	mm	mm	
M 3	0,50	3,500	2,70	2,500	56,00	10,00	18,00	3,000
M 4	0,70	4,500	3,40	3,300	63,00	12,00	21,00	4,000
M 5	0,80	6,000	4,90	4,200	70,00	14,00	25,00	5,000
M 6	1,00	6,000	4,90	5,000	80,00	16,00	30,00	6,000
M 8	1,25	8,000	6,20	6,800	90,00	17,00	35,00	8,000
M10	1,50	10,000	8,00	8,500	100,00	20,00	39,00	10,000

pro závit v průchozím otvoru