


	Obj. číslo	5738
	Norma	DIN 2184-1
	Norma	DIN 376
	Materiál nástroje	HSS-E
	Typ	N R40
	Tvar	C
	Tolerance průměru	6HX
	Směr řezu	pravý
	Rabatová skupina	203



závit ve slepém otvoru

S povlak TiN

externí chlazení

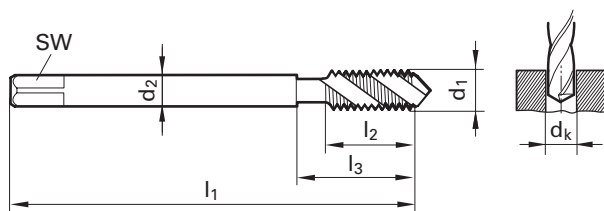

d1	P	d2	SW	dk	l1	l2	l3	Kód
mm	mm	mm	mm	mm	mm	mm	mm	
M 3	0,50	2,200		2,500	56,00	6,00	18,00	3,000
M 4	0,70	2,800	2,10	3,300	63,00	7,50	21,00	4,000
M 5	0,80	3,500	2,70	4,200	70,00	8,50	25,00	5,000
M 6	1,00	4,500	3,40	5,000	80,00	11,00	30,00	6,000
M 8	1,25	6,000	4,90	6,800	90,00	14,00	35,00	8,000
M10	1,50	7,000	5,50	8,500	100,00	16,00	39,00	10,000
M12	1,75	9,000	7,00	10,20	110,00	18,50	49,00	12,000
M14	2,00	11,000	9,00	12,00	110,00	20,00	53,00	14,000
M16	2,00	12,000	9,00	14,00	110,00	20,00	54,00	16,000
M20	2,50	16,000	12,00	17,50	140,00	25,00	62,00	20,000
M24	3,00	18,000	14,50	21,00	160,00	30,00	73,00	24,000

pro závit ve slepém otvoru