


	<b>Obj. číslo</b>	<b>5739</b>
	<b>Norma</b>	<b>DIN 2184-1</b>
	<b>Norma</b>	<b>DIN 374</b>
	<b>Materiál nástroje</b>	<b>HSS-E-PM</b>
	<b>Typ</b>	<b>N</b>
	<b>Tvar</b>	<b>B</b>
	<b>Tolerance průměru</b>	<b>ISO 2 / 6H</b>
	<b>Směr řezu</b>	<b>pravý</b>
	<b>Rabatová skupina</b>	<b>203</b>

 závit v průchozím otvoru

 povlak TiN

 externí chlazení

**HSS-E-PM +  
TiN PRO  
MAXIMÁLNÍ  
ŽIVOTNOST**

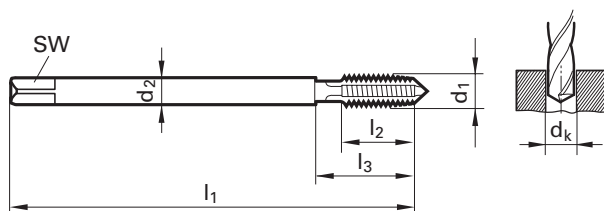

d1 X P	d2	SW	dk	l1	l2	l3	Kód
	mm		mm	mm	mm	mm	
M 8 X1	6,000	4,90	7,000	90,00	16,00	35,00	8,005
M10 X1	7,000	5,50	9,000	90,00	16,00	35,00	10,005
M10 X1,25	7,000	5,50	8,800	100,00	20,00	39,00	10,006
M12 X1	9,000	7,00	11,000	100,00	20,00	40,00	12,005
M12 X1,25	9,000	7,00	10,800	100,00	20,00	40,00	12,006
M12 X1,5	9,000	7,00	10,500	100,00	20,00	40,00	12,007
M14 X1	11,000	9,00	13,000	100,00	20,00	40,00	14,006
M14 X1,5	11,000	9,00	12,500	100,00	20,00	40,00	14,007
M16 X1,5	12,000	9,00	14,500	100,00	22,00	44,00	16,007
M18 X1,5	14,000	11,00	16,500	110,00	25,00	44,00	18,007
M20 X1,5	16,000	12,00	18,500	125,00	25,00	44,00	20,007
M22 X1,5	18,000	14,50	20,500	125,00	25,00	44,00	22,007
M24 X1,5	18,000	14,50	22,500	140,00	28,00	48,00	24,007
M24 X2	18,000	14,50	22,000	140,00	28,00	48,00	24,008

pro závit v průchozím otvoru



23