




DIN 603

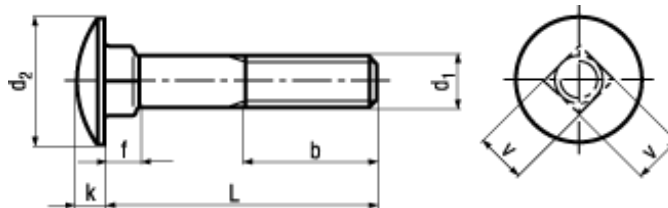

## BN 645

**Šrouby s plochou půlkulatou hlavou**

se čtyřhranným osazením bez šestihřanné matice

Nerezová ocel A2

- ~UNI 5732
- ~CSN 021319



Průměr dířku bez závitů může být dle volby výrobce shodný se středním průměrem závitů

b: provedení s částečným závitem nelze zaručit

Article#	d <sub>1</sub>	d <sub>2</sub> max.	k max.	f max.	v max.	b~	L
1484869	M5	13,55	3,3	4,1	5,48	8	16
1484877						12	20
1484885							25
1484893							30
1484907						16	35
1484915							40
1143808							45
1143816							50
1413295	M6	16,55	3,88	4,6	6,48	8	16
1413317						10	20
1413333						15	25
1413503						18	30
1413511							35
1242865							40
1413538							45
1242873							50
3143337							55
1242881							60
1242903							70
1242911							80
3143338							90
1413546							100
3202157							110
8303843	M8	20,65	4,88	5,6	8,58	8	16
1413708							20
1413724						13	25

b: provedení s částečným závitem nelze zaručit

Article#	d <sub>1</sub>	d <sub>2 max.</sub>	k max.	f max.	v max.	b~	L
1413732	M8	20,65	4,88	5,6	8,58	18	30
1413740						22	35
1242938							40
1143824							45
1242946							50
1242954							60
1242962							70
1242970							80
3143341							90
1413759							100
3202158							110
3143340							120
3202159						28	130
3143343	M10	24,65	5,38	6,6	10,58	11	20
1413767							25
1413775						16	30
1413783						21	35
1242989						26	40
1413791							45
1242997							50
5522935							55
1243004							60
1243012							70
1413805							80
1243039							90
1243047							100
3143342							120
5520730						32	130
1413813	M12	30,65	6,95	8,75	12,7	12	30
1143972						17	35
1413821						22	40
1144073						27	45
1243063						30	50
1243071							60
1243098							70
1243101							80
1243128							90
1243136							100
1243144							110
1243152							120