

Trhací nýty hliníkové se zapuštěnou hlavou 120°

DIN 7337




Hliník AlMg3,5%



Ocel pozinkovaná



d mm	L mm	D mm	 mm	K mm	 mm			€ / 1000	Nº
2,4	6,0	4,8	2,5	0,8	0,8 ÷ 3,5	1 000	8 000		10300 2406
2,4	7,0	4,8	2,5	0,8	3,5 ÷ 4,5	1 000	8 000		10300 2407
2,4	9,0	4,8	2,5	0,8	4,5 ÷ 6,5	1 000	8 000		10300 2409
3,0	6,0	5,5	3,0	1,0	0,5 ÷ 4,0	1 000	8 000		10300 3006
3,0	10,0	5,5	3,0	1,0	4,0 ÷ 6,0	1 000	8 000		10300 3010
3,2	8,0	5,8	3,3	1,0	3,5 ÷ 5,0	1 000	8 000		10300 3208
3,2	10,0	5,8	3,3	1,0	5,0 ÷ 6,5	1 000	8 000		10300 3210
3,2	12,0	5,8	3,3	1,0	6,5 ÷ 8,5	1 000	8 000		10300 3212
3,2	18,0	5,8	3,3	1,0	8,5 ÷ 14,5	1 000	8 000		10300 3218
4,0	6,0	7,5	4,0	1,1	0,5 ÷ 2,5	1 000	8 000		10300 4006
4,0	8,0	7,5	4,0	1,1	2,5 ÷ 4,5	1 000	8 000		10300 4008
4,0	10,0	7,5	4,0	1,1	4,5 ÷ 6,0	500	4 000		10300 4010
4,0	12,0	7,5	4,0	1,1	6,0 ÷ 8,0	500	4 000		10300 4012
4,0	14,0	7,5	4,0	1,1	8,0 ÷ 10,0	500	4 000		10300 4014
4,0	16,0	7,5	4,0	1,1	10,0 ÷ 11,0	500	4 000		10300 4016
4,0	18,0	7,5	4,0	1,1	11,0 ÷ 13,0	500	4 000		10300 4018
4,8	8,0	9,0	5,0	1,3	1,0 ÷ 3,0	500	4 000		10300 4808
4,8	10,0	9,0	5,0	1,3	3,0 ÷ 5,0	500	4 000		10300 4810
4,8	12,0	9,0	5,0	1,3	6,0 ÷ 8,0	500	4 000		10300 4812
4,8	14,0	9,0	5,0	1,3	7,0 ÷ 9,0	500	4 000		10300 4814
4,8	16,0	9,0	5,0	1,3	10,0 ÷ 12,0	500	4 000		10300 4816
4,8	18,0	9,0	5,0	1,3	11,0 ÷ 13,0	500	4 000		10300 4818
4,8	20,0	9,0	5,0	1,3	0,0 ÷ 15,0	250	2 000		10300 4820
4,8	25,0	9,0	5,0	1,3	15,0 ÷ 19,0	250	2 000		10300 4825

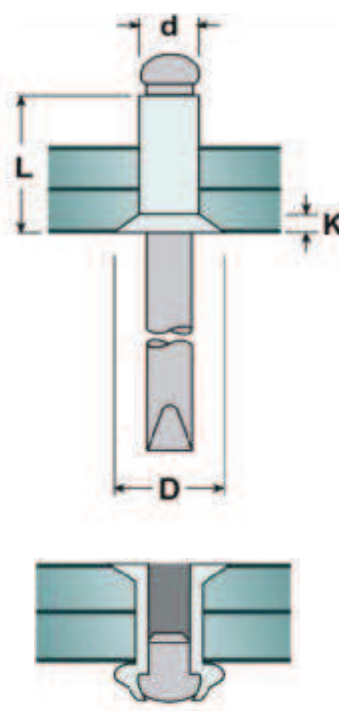

d mm	 N	 N
2,4	485	353
3,0	926	662
3,2	1 058	837
4,0	1 808	1 279
4,8	2 558	1 896